

PGM22

LIGHTWEIGHT WALK-BEHIND REEL MOWER



- PROFESSIONAL LEVEL-OF-CUT
- HONDA® ENGINE
- INCOMMAND™ OPERATOR CONTROLS

The PGM22 Inch will be sure to give you Jake's Signature Cut, Trusted by Generations. This user-friendly machine is a lightweight, walk-behind reel mower, which is simple to set up and operate.

The PGM22 gives you a professional level-of-cut and the dependability you need, fitted with a reliable Honda® engine. Combined with InCommand™ operator controls, it will work to produce greens and fine turf surfaces you're proud of everyday. Robust engineering and simple maintenance make the PGM22 a sports mower you can rely on.

* Engine power is provided by engine manufacturer. Actual operating power output may vary due to conditions of specific use.

** Height of cut depends on turf condition, reel wear and bedknife installed.

CUT WIDTH
22"
(55.9CM)

CUT HEIGHT**
0.062" - 0.438"
(1.6MM - 11.11MM)

BLADES PER REEL
11 OR 15

FUEL CAPACITY
0.66 GAL
(2.5L)

MOWER ENGINE
HONDA® GX-120
GAS ENGINE

MOWER POWER*
4HP
(2.9KW)



SINCERELY

Jake

For information and support:
www.jacobsen.com / +44 (0) 1473 270 000 / +1-888-438-3946



Actual operating power output may vary due to conditions of specific use. Run time will vary based on conditions of specific use, accessories, and terrain. NOTE: Specifications, while correct at time of printing, may change without notice.

© 2021 Textron Specialized Vehicles Inc.

PGM22

LIGHTWEIGHT WALK-BEHIND REEL MOWER




Ergonomic, easy to use controls

InCommand™ control system

Trustworthy Honda® Engine

Tailored options to fit your requirements

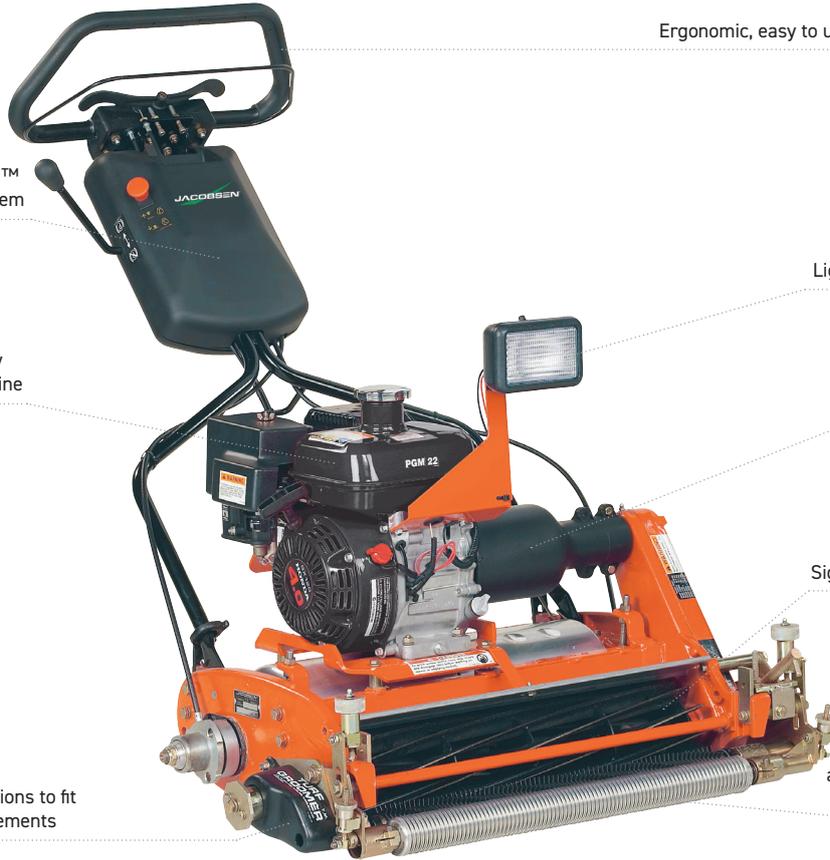

Optional Lighting Pack

Durable centrifugal clutch

Jake's Signature Cut

Durable, and reliable features



Proven quality of cut



Ease of Maintenance



InCommand™ control system

REELS & BLADES

BLADE MATERIAL	Hardened, high manganese carbon steel
REEL SPEED	Dependent on Engine RPM and 2.25:1 reel reduction ration
REEL BEARINGS	Spring-loaded, tapered roller
REEL DIAMETER	5" (127 mm)
FREQUENCY OF CLIP	15 blade: .150" (5.2 mm)
SIDE FRAME MATERIAL	Cast-aluminum alloy

TRACTION, BRAKES & SPEED

MOWER DRIVE SYSTEM	Centrifugal. Drive Clutch
TRACTION DRIVE	Chain Drive
TRACTION REDUCTION RATIO	24:1
OPERATOR PRESENCE CONTROL	Standard InCommand™ operator controls (Traction and Reel) with integrated Operator Presence Control
DIFFERENTIAL	Full automotive type, housed in traction drum
TRACTION DRUM	7.75" (19.68cm) diameter smooth machined aluminum
BRAKES	Lever actuated hub brake with parking lock
TRANSPORT WHEELS	2 x Pneumatic 11" x 4" (27.94cm x 10cm)
MAXIMUM TORQUE	5.4 ft. lbs (7.5Nm)
MOWING SPEED	Dependent on Engine RPM 3.2mph (5.14km/h) max

WEIGHTS & DIMENSIONS

WEIGHT	11 blade reel: 184lb (83.4kg), 15 blade reel: 194lb (88kg) (with Catcher, grooved steel roller and kickstand)
--------	---

SOUND LEVEL

MOWER SOUND LEVEL	95 dBA
-------------------	--------

WARRANTY

MOWER WARRANTY	2 Years
----------------	---------

ACCESSORIES

- Front rollers
- Turf groomers for three-dimensional mowing
- Mower caddy
- Verticutters
- LED light kit
- Full line of accessories